


Dimensions				
Unit	Rack Capacity (# of Racks)	A (in)	B (in)	C (in)
FD10	4	132	53	90
FD14	4	153	59	98
	6	176	59	98
	8	211	59	98
FD24	8	191	70	98
	10	214	70	98
	12	237	70	98
FD60	12	198	93	110
	15	221	93	110
	18	244	93	110
	21	267	93	110
	24	290	93	110

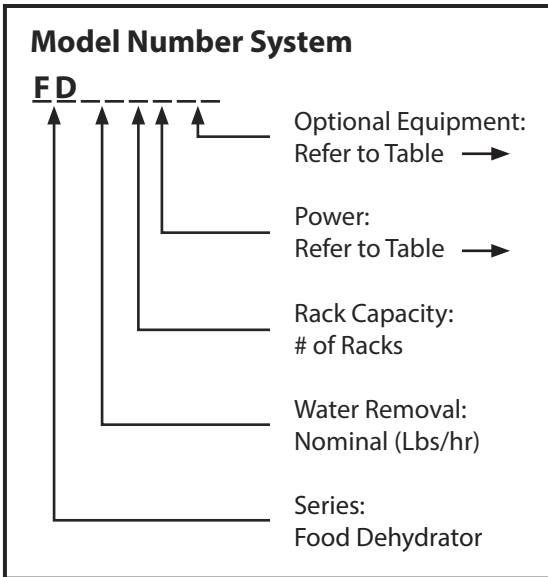

Option	Notes	Designation
Venting	Alternative to external condenser	V
Floor	Adds 4" to dimension (C)	F

Voltage (V)	Phase (Φ)	Frequency (Hz)	Amps (A)				Designation
			FD10	FD14	FD24	FD60	
208 - 220/240	1	60	47	87	114	N/A	A
	3	60	N/A	45	70	151	F
480	3	60	N/A	23	34	70	C

Model	Maximum Watts (kW)	Temperature (F)	Rack Capacity (# of Racks)	Drying Area (sqft)	Interior Finish	Exterior Finish
FD 10	11	80 - 120	4	260	Stainless Steel	Galvalume Steel
FD 14	20	80 - 160	4, 6, 8	260 - 520		
FD 24	25	80 - 160	8, 10, 12	520 - 780		
FD 60	62	80 - 160	12, 15, 18, 21, 24	780 - 1560		